

SL-Lubrication units

SL-Lubrication unit is designed with an oil reservoir which is equipped with a high-density fiber net. Through the fiber net, the lubricant can be steadily fed onto the surface of the rail to satisfy the required lubricating function.

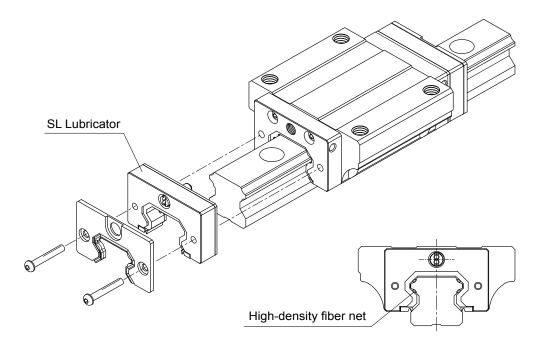

By using the SL Lubricator, the interval between maintenance work can be lengthened at all load ratings.

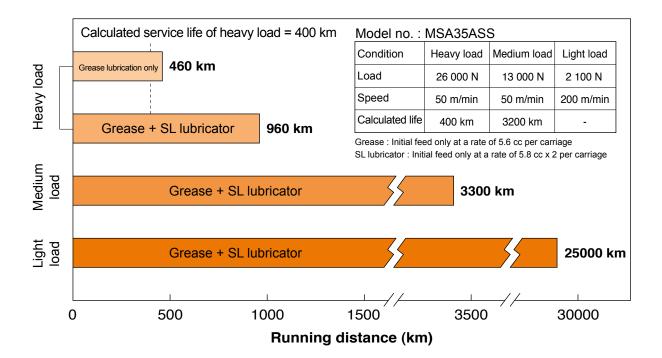

www.aluflex.com